



PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr

73-087-29 SMTIR9901 IR sensor

73-087-37 SMTIR9902 IR sensor

The SMARTEC Infrared Sensors

... WHERE CONTACTLESS TEMPERATURE M

PRODUCT DESCRIPTION

The Smartec infrared sensor SMTIR9901 and SMTIR9902 are sophisticated full silicon infrared sensors and comprise of so called thermopiles. Thermopiles are based on the Seebeck effect, which is a long time standard for conventional thermocouples. The application of thin film technology allows the production of miniaturised and low cost sensor elements.

The sensors can be used in measuring the radiation temperature without any contact. For different radiation temperature ranges various filters are available. The sensor type SMTIR9902 contains a temperature sensor for measuring the temperature of the sensor itself. The temperature range of the sensor-element is between -40 to 100 °C. The sensor is available in a standard TO-05 encapsulation and is equipped with a 5.5 micrometer filter.



The SMARTEC infrared sensors

Most Important Features and Typical Applications

Most Important Features

- High accuracy
- High sensitivity (110 V/W)
- Low resistance (50 kohm) and therefor
- Very good signal-to-noise-ratio
- Good response time (40 ms)
- Low cost thin film technology
- Easy and accurate measuring of the sensor temperature by means of a built-in temperature sensor (SMTIR9902).

Typical Applications

- Contactless measurement of surface temperatures or Infrared radiation
- Temperature measurement on moving objects
- Continuous temperature control of industrial sites
- Thermal alarm systems
- Climate control
- Medical instruments
- Home appliances


The SMARTEC infrared sensors

FUNCTIONAL DESCRIPTION

The output voltage is generated by a thermopile, formed by a series connection of thermojunctions deposited on a silicon substrate. The hot junctions are thermally isolated from the cold junctions on the substrate by etching an extremely thin membrane. A black absorbing layer on the hot junctions transform the incoming radiation into heat. A voltage proportional to the radiation is generated by the thermoelectric effect.

The used thermopiles are processed on 400 mm silicon substrates using BiSb and NiCr for the thermojunctions. For different radiation spectra various filters are available to get the optimal solution.

Easy and accurate measuring of the sensor temperature can be done with a built-in temperature sensor (only for type SMTIR9902).

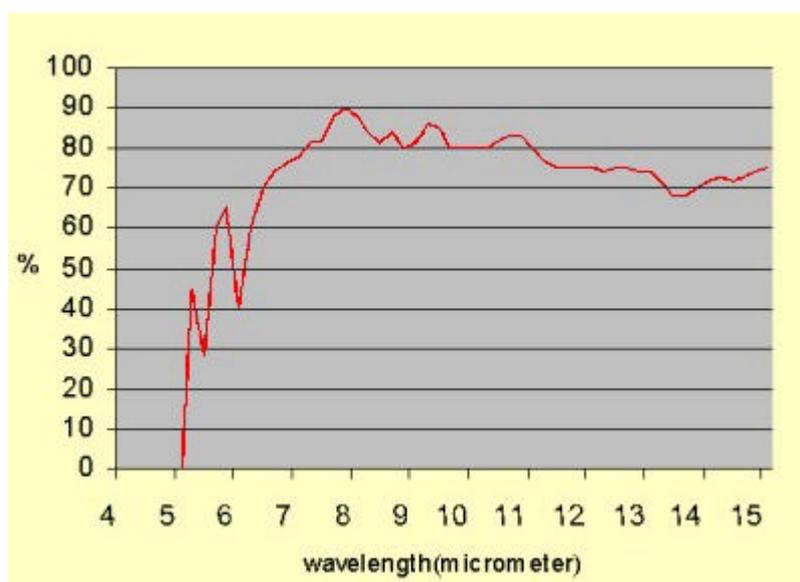

Filter(characteristic)

The diagram shows the SMT IR 9902 responsiveness as function of the incoming wavelength..

1 Introduction

The Smartec infrared sensor SMTIR9901 and SMTIR9902 are sophisticated full silicon infrared sensors. The sensors can be used in measuring the radiation temperature without any contact. For the different radiation temperature ranges various filters are available. The sensor type SMTIR9902 contains a temperature sensor for measuring the temperature of the sensor itself. The temperature range of the sensor-element is between - 40 to 100 °C. The sensor is available in a standard TO-05 encapsulation and with a 5.5. µm high pass filter.

2 Typical applications


- Contactless measurement of surface temperatures or Infrared radiation
- temperature measurement on moving objects.
- Continuous temperature control of manufacturing.
- Thermal alarmsystems
- Climate control
- Medical instruments
- Home appliances.

Easy and accurate measuring of the sensors temperature by means of a built-in temperature sensor(only for type SMTIR9902).

The main characteristics of the infrared sensor are:

- High accuracy
- High sensitivity (110 V/W)
- Low resistance (50 KΩ) and therefore
- Very good signal-to-noise-ratio
- Good response time (40 ms)
- Low cost thin film technology

3 Pin-out and housing (TO 5)

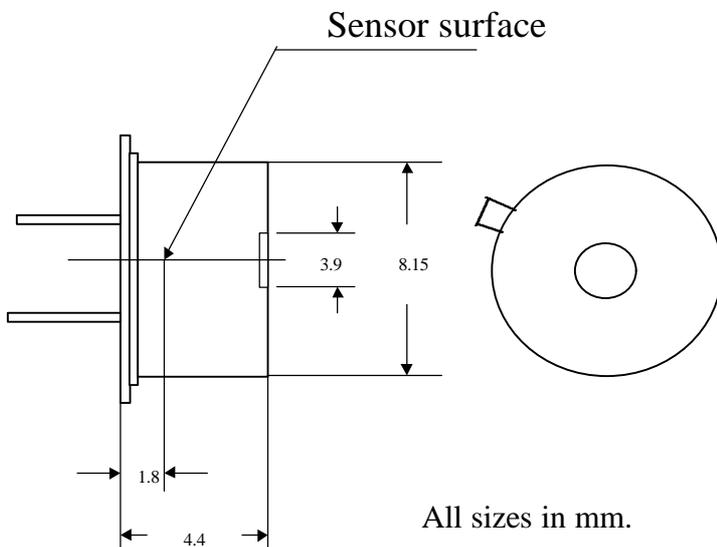


SMTIR9902

- 1 = det -
- 2 = det +
- 3 = NI1000
- 4 = NI1000

SMTIR9901

- 1 = det -
- 2 = det +
- 3 = N.C.
- 4 = GND

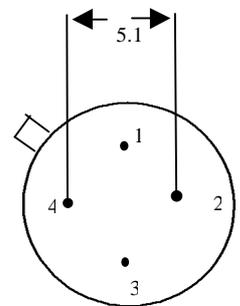

Bottom view

4 Product description.

Thermopiles are based on the Seebeck effect, which can be considered ever since a long time as standard for conventional thermocouples. The application of thin film technology allows the production of miniaturized and low cost sensor elements. A series connection of thermojunctions deposited on a silicon substrate forms the thermopile. The hot junctions are thermally isolated from the cold junctions on the substrate by etching an extremely thin membrane. A black absorbing layer on the hot junctions transform the incoming radiation into heat. A voltage proportional to the radiation is generated by the thermoelectric effect.

The used thermopiles are processed on 400 μm silicon substrates using BiSb and NiCr for the thermojunctions.

For different radiation spectra various filters are available to find the optimal solution.

5 Specifications


Parameters	typical	units
Number of thermojunctions	100	
Active area	0.50	mm ²
Die size	2.2 * 2.2	mm ²
Resistance of thermopile	50 \pm 15	K Ω
Sensitivity	110 \pm 20	V/W 1)
Temp coeff of sensitivity	-0.52 \pm 0.08	%/K
Specific Detectivity	2.1 * 10e8	cm.Hz ^{1/2} /W 1)
Noise equivalent power	0.35	nW 1)
Noise Voltage	37	nV/Hz ^{1/2}
Time constant	40 \pm 10	ms (63 %)
Temperature range (sensor)	-20 - 100	$^{\circ}\text{C}$
Storage temperature	-40 - 100	$^{\circ}\text{C}$
Filter (high Pass)	5.5	μm

1) at 500 K,DC

Reference thermistor (SMTIR9902 only)

Resistance	1.000 \pm 0.004	K Ω (@ 25 $^{\circ}\text{C}$)
------------	-------------------	--

FILTER (characteristic)

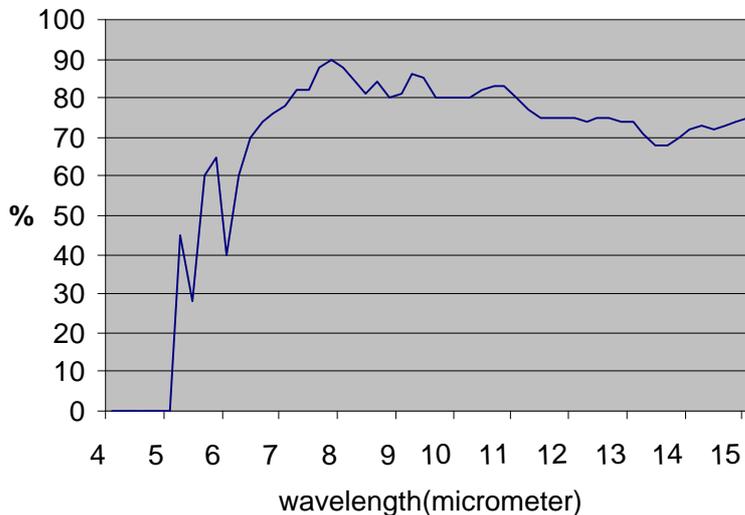

6 Understanding the specifications

Sensitive area.

The sensitive area is a square of .5 mm². By using the distance between the sensor element and the glass filter and its diameter the field of view can be determined. The field of view can be changed by using special lenses. In case lenses are used the emissivity and the spectrum has to be considered.

Filter.

The sensors are standardwise equipped with a high pass filter. From the theory it is well known that each body has a radiation at a certain temperature. This radiation temperature has a frequency related to that temperature. For general use the filter used is a high pass filter with a cut-off wavelength of 5.5 μm .

Sensor resistance.

It must be clear that this type of thermopile has a reasonable output resistance. This resistance has to be considered when designing the input amplifier to prevent off-sets, etc.

Time constant.

The time constant is the time needed to reach an output voltage of 66 % of the final level. This time constant only depends on the physical construction.

Temperature reference resistor(SMTIR9902).

It is well known that for application on a infrared sensor the temperature of the sensor must be considered in the calculation of the radiation temperature. The used resistor Is a standard Ni resistor with a value of 1000 Ω @ 25 $^{\circ}\text{C}$.

Infrared sensor type: SMTIR9901/9902
Version : 2.1
Date : March 2002

The relation between the resistance value and the temperature is given below:

$$R(T)=R_0*(1+A*T+B*T^2+C*T^4+D*T^6) \quad \text{tolerance class B}$$

R_0 = resistance @ 0°C = 876.20 Ω

T = Temperature in °C

A = $5.485 * 10^{-3}$

B = $6.650 * 10^{-6}$

C = $2.805 * 10^{-11}$

D = $2.000 * 10^{-17}$

6 Ordering information

SMTIR9901 Infraredsensor without temperature sensor

SMTIR9902 Infraredsensor with temperature sensor

For more information and or samples:

SMARTEC BV
Delpratsingel 26
4811 AP BREDA
The Netherlands

Tel: * 31 76 520 5353

Fax: * 31 76 520 5354

Email: SMARTECNL@CS.COM

URL: WWW.SMARTEC.NL